


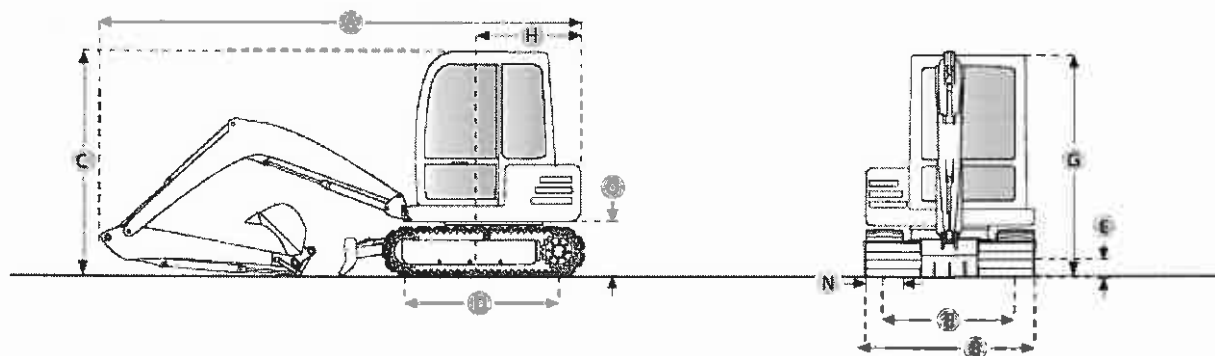

Selected Dimensions

Boom/Stick Option (HEX) 1

A. SHIPPING LENGTH OF UNIT	11.3 ft In	3450 mm
C. SHIPPING HEIGHT OF UNIT	7.5 ft In	2300 mm
J. MAX LOADING HEIGHT	8.6 ft In	2630 mm
K. MAX REACH ALONG GROUND	7.6 ft In	2310 mm
M. MAX DIGGING DEPTH	7.2 ft In	2200 mm

Dimensions

B. WIDTH TO OUTSIDE OF TRACKS	4.1 ft In	1250 mm
D. LENGTH OF TRACK ON GROUND	5 ft In	1525 mm
E. GROUND CLEARANCE	0.57 ft In	175 mm
H. TAIL SWING RADIUS	2.1 ft In	640 mm

Undercarriage

N. SHOE SIZE	9.1 In	230 mm
--------------	--------	--------

Specification

Engine

MAKE	Yanmar	
MODEL	3TNV70-XBV	
GROSS POWER	13.5 hp	10.1 kw
POWER MEASURED @	2200 rpm	
NUMBER OF CYLINDERS	3	

Operational

OPERATING WEIGHT	3836 lb	1740 kg
HYDRAULIC SYSTEM RELIEF VALVE PRESSURE	2987.8 psi	20600 kPa
HYDRAULIC PUMP FLOW CAPACITY	15.3 gal/min	58.1 L/min

Undercarriage

SHOE SIZE	9.1 In	230 mm
MAX TRAVEL SPEED	2.7 mph	4.3 km/h

Buckets

REFERENCE BUCKET CAPACITY	0.05 yd ³	0.04 m ³
---------------------------	----------------------	---------------------

Boom/Stick Option (HEX) 1

SHIPPING HEIGHT OF UNIT	7.5 ft In	2300 mm
SHIPPING LENGTH OF UNIT	11.3 ft In	3450 mm
MAX DIGGING DEPTH	7.2 ft In	2200 mm
MAX REACH ALONG GROUND	7.6 ft In	2310 mm
MAX LOADING HEIGHT	8.6 ft In	2630 mm

Dimensions

WIDTH TO OUTSIDE OF TRACKS	4.1 ft In	1250 mm
GROUND CLEARANCE	0.57 ft In	175 mm
TAIL SWING RADIUS	2.1 ft In	640 mm

